


# Acano Solution: Acano Server Hardware & Environmental Data Sheet

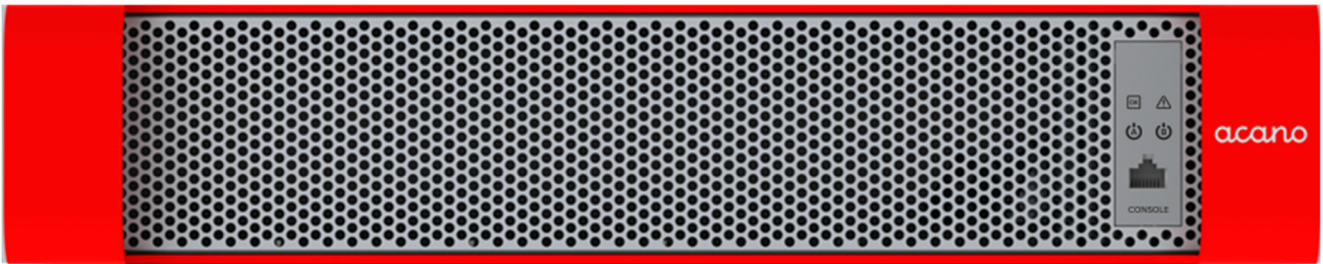

## Product Overview

The Acano Server comes with either or both of the following software components:

- ▶ Acano Edge
- ▶ Acano Core

## Physical

- ▶ Depth 702mm (27.6")
- ▶ Width 431mm (17.0")
- ▶ Height 89mm (3.5")
- ▶ 19" rack mountable 2U high (kit supplied)
- ▶ Weight: 23kg (51lbs) max.
- ▶ 4 x 100/1000/10G Ethernet connections for media
- ▶ 1 x 10/100/1000 Ethernet connection for administration
- ▶ Serial console (115200 baud)

## Electrical

- ▶ Power supply units: 2 (1 + 1 fully redundant)
- ▶ Power (Acano X3): 1000W max
- ▶ Supply voltage range: 100-240 VAC

## Environmental Operating Conditions

- ▶ Temperature range: 0°C - 40°C
- ▶ Relative humidity: 20-90% non-condensing
- ▶ Heat output (Acano X3): 3412 BTU/h max

## Approvals

### Safety

- ▶ CB Scheme certificate
- ▶ CE Mark
- ▶ EN 60950-1:2006
- ▶ UL 60950-1 Second Edition, CAN/CSA-C22.2 No. 60950-1-07
- ▶ IEC 60950-1 Second Edition

### Electromagnetic Compatibility

- ▶ CE Mark
- ▶ EN 55022 class A, EN 61000, EN 55024
- ▶ FCC 47CFR Part 15 class A

## Contact information

In the first instance, always contact your Acano reseller.

For general support, go to [www.acano.com/support](http://www.acano.com/support)

---

### Acano Americas

350 7th Ave.  
Suite 1702  
New York, NY 10001

---

### Acano Europe and Asia

2 Bakers Yard,  
163 High St  
Uxbridge UB8 1JZ  
United Kingdom

---

### Acano Federal

19309 Winmeade Dr.  
Suite 445  
Lansdowne, VA 20176

---

This document is provided for information purposes only and its contents are subject to change without notice. This document may not be reproduced or transmitted in any form or by any means, for any purpose other than the recipient's personal use without our prior written permission.

Acano and coSpace are trademarks of Acano. Other names may be trademarks of their respective owners out our prior written permission